


KB...GUUAJ · AJUSTABLE

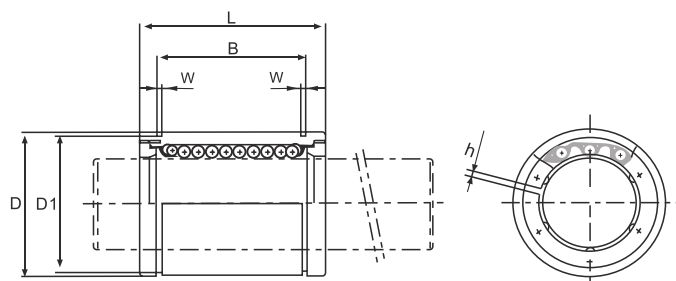

Referencia*	dr (mm)	Tol. (μm)	D (mm)	Tol. (μm)	L (mm)	Tol. (μm)	B (mm)	Tol. (μm)	W (mm)	D1 (mm)	h (mm)	h1 (mm)	θ	Peso (g)
KB5GUUAJ	5		12	0	22		14.5		1.1	11.5	1	-	-	11
KB8GUUAJ	8	+8 0	16	-8	25		16.5		1.1	15.2	1	-	-	22
KB12GUUAJ	12		22	0	32	0 -200	22.9	0 -300	1.3	21	1.5	7.5	78°	45
KB16GUUAJ	16	+9	26	-9	36		24.9		1.3	24.9	1.5	10	78°	60
KB20GUUAJ	20	-1	32		45		31.5		1.6	30.3	2	10	60°	102
KB25GUUAJ	25	+11	40	0 -11	58		44.1		1.85	37.5	2	12.5	60°	235
KB30GUUAJ	30	-1	47		68	0	52.1	0	1.85	44.5	2	12.5	50°	360
KB40GUUAJ	40		62	0	80	-300	60.6	-400	2.15	59	3	16.8	50°	770
KB50GUUAJ	50	+13 -2	75	-13	100		77.6		2.65	72	3	21	50°	1250
KB60GUUAJ	60		90	0/-15	125	[0/-400]	101.7		3.15	86.5	3	27.2	54°	2220

Referencia*	Nº de circuito de bolas	Excentricidad max. (μm)	Tolerancia radial max. (μm)	Capacidad de carga	
				Dinámica C (N)	Estática Co (N)
KB5GUUAJ	4	12	-3	206	265
KB8GUUAJ	4	12	-3	265	402
KB12GUUAJ	4	12	-4	510	784
KB16GUUAJ	5	12	-4	775	1180
KB20GUUAJ	5	15	-6	862	1370
KB25GUUAJ	6	15	-6	980	1570
KB30GUUAJ	6	15	-8	1570	2740
KB40GUUAJ	6	17	-8	2160	4020
KB50GUUAJ	6	17	-13	3820	7940
KB60GUUAJ	6	20	-13	4700	9800

* Variaciones disponibles bajo demanda:

- Retén de acero
- Jaula de acero
- Inoxidable