



KBA...SUU · SIMPLE (2 TALADROS)

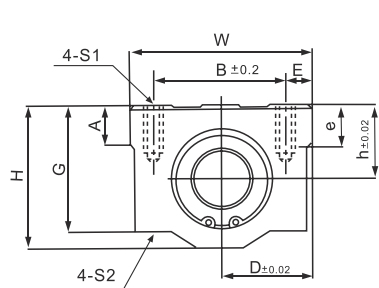

Referencia	h	D	W	H	G	A	B	E	S1xe	S2	C	L	Peso (g)
KBA8SUU	11	17	34	22	18	6	24	5	M4X8	3.4	7.2	14.4	25
KBA12SUU	15	22	44	30	24.5	8	33	5.5	M5X12	4.3	10.4	20.8	65
KBA16SUU	19	25	50	38.5	32.5	9	36	7	M5X12	4.3	11.2	22.4	100
KBA20SUU	21	27	54	41	35	11	40	7	M6X12	5.2	14.5	29	148
KBA25SUU	26	38	76	51.5	42	12	54	11	M8X18	7	20.45	40.9	368
KBA30SUU	30	39	78	59.5	49	15	58	10	M8X18	7	24.45	48.9	500
KBA40SUU	40	51	102	78	62	20	80	11	M10X25	8.7	28.2	56.4	1000
KBA50SUU	52	61	122	102	80	25	100	11	M10X25	8.7	36.2	72.4	2205

Referencia	Capacidad de carga	
	Dinámica C (N)	Estática Co (N)
KBA8SUU	274	392
KBA12SUU	510	784
KBA16SUU	774	1180
KBA20SUU	882	1370
KBA25SUU	980	1570
KBA30SUU	1574	2740
KBA40SUU	2160	4020
KBA50SUU	3820	7940