



## KBE...UU · SIMPLE ABIERTO (4 TALADROS)

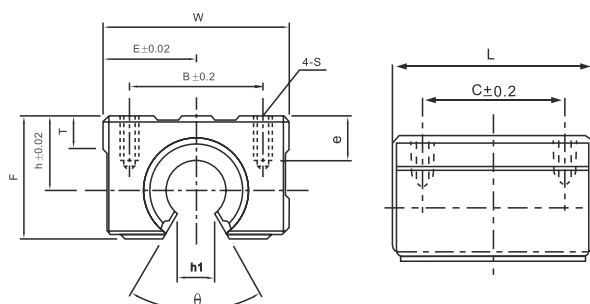

| Referencia | Diam. del eje | h  | D    | W   | L   | H  | T  | h1   | θ   | B  | C  | S x e  | Peso (g) |
|------------|---------------|----|------|-----|-----|----|----|------|-----|----|----|--------|----------|
| KBE16UU    | 16            | 20 | 22.5 | 45  | 45  | 33 | 9  | 10   | 80° | 32 | 30 | M5x12  | 150      |
| KBE20UU    | 20            | 23 | 24   | 48  | 50  | 39 | 11 | 10   | 60° | 35 | 35 | M6x12  | 200      |
| KBE25UU    | 25            | 27 | 30   | 60  | 65  | 47 | 14 | 11.5 | 60° | 40 | 40 | M6x12  | 450      |
| KBE30UU    | 30            | 33 | 35   | 70  | 70  | 56 | 15 | 14   | 60° | 50 | 50 | M8x18  | 630      |
| KBE40UU    | 40            | 42 | 45   | 90  | 90  | 72 | 20 | 19   | 60° | 65 | 65 | M10x20 | 1330     |
| KBE50UU    | 50            | 53 | 60   | 120 | 110 | 92 | 25 | 23   | 60° | 94 | 80 | M10x20 | 3000     |

| Referencia | Capacidad de carga |                 |
|------------|--------------------|-----------------|
|            | Dinámica C (N)     | Estática Co (N) |
| KBE16UU    | 774                | 1180            |
| KBE20UU    | 882                | 1370            |
| KBE25UU    | 980                | 1570            |
| KBE30UU    | 1570               | 2740            |
| KBE40UU    | 2160               | 4020            |
| KBE50UU    | 3820               | 7940            |