


KBF...GWUU · DOBLE BRIDA REDONDA

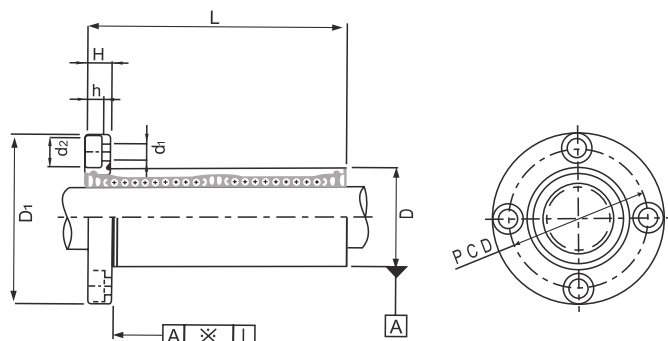

Referencia*	dr (mm)	Tol. (μm)	D (mm)	Tol. (μm)	L (mm)	Tol. (μm)	D1 (mm)	H (mm)	PCD (mm)	K (mm)	d1xd2xh (mm)	Peso (g)
KBF8GWUU	8	+8	16	0/-11	25	±300	32	5	24	25	3.5x6x3.1	41
KBF12GWUU	12	0	22	0	32		42	6	32	32	4.5x7.5x4.1	80
KBF16GWUU	16	+9	26	-13	36	-200	46	6	36	35	4.5x7.5x4.1	103
KBF20GWUU	20	-1	32	0	45		54	8	43	42	5.5x9x5.1	182
KBF25GWUU	25	+11	40	-16	58		62	8	51	50	5.5x9x5.1	335
KBF30GWUU	30	-1	47	0	68	-300	76	10	62	60	6.6x11x6.1	560
KBF40GWUU	40	+13	62	0	80		98	13	80	75	9x14x8.1	1175
KBF50GWUU	50	-2	75	-19	100		112	13	94	88	9x14x8.1	1745
KBF60GWUU	60		90	0/-22	125	-400	134	18	112	106	11x17x11.1	3220

Referencia*	Nº de circuito de bolas	Excentricidad max. (μm)	Capacidad de carga	
			Dinámica C (N)	Estática Co (N)
KBF8GWUU	4	12	265	402
KBF12GWUU	4		510	784
KBF16GWUU	5		578	892
KBF20GWUU	5	15	862	1370
KBF25GWUU	6		980	1570
KBF30GWUU	6		1570	2740
KBF40GWUU	6	20	2160	4020
KBF50GWUU	6		3820	7940
KBF60GWUU	6		4700	9800

* Variaciones disponibles bajo demanda:

- Retén de acero
- Jaula de acero
- Inoxidable