



KBK...GWUU · DOBLE BRIDA CUADRADA

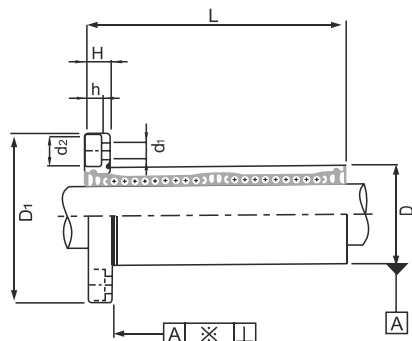

Referencia*	dr (mm)	Tol. (μm)	D (mm)	Tol. (μm)	L (mm)	Tol. (μm)	D1 (mm)	H (mm)	PCD (mm)	K (mm)	d1xd2xh (mm)	Peso (g)
KBK8GWUU	8	+8 0	16	0/-11	25	±300	32	5	24	25	3.5x6x3.1	41
KBK12GWUU	12	+9 -1	22	0 -13	32	-200	42	6	32	32	4.5x7.5x4.1	80
KBK16GWUU	16	+11 -1	26	0 -16	36	-300	46	6	36	35	4.5x7.5x4.1	103
KBK20GWUU	20	+13 -2	32	0 -19	45	-400	54	8	43	42	5.5x9x5.1	182
KBK25GWUU	25		40		58		62	8	51	50	5.5x9x5.1	335
KBK30GWUU	30		47		68		76	10	62	60	6.6x11x6.1	560
KBK40GWUU	40		62		80		98	13	80	75	9x14x8.1	1175
KBK50GWUU	50		75		100		112	13	94	88	9x14x8.1	1745
KBK60GWUU	60		90		125		134	18	112	106	11x17x11.1	3220

Referencia*	Nº de circuito de bolas	Excentricidad max. (μm)	Capacidad de carga	
			Dinámica C (N)	Estática Co (N)
KBK8GWUU	4	12	265	402
KBK12GWUU	4		510	784
KBK16GWUU	5		578	892
KBK20GWUU	5	15	862	1370
KBK25GWUU	6		980	1570
KBK30GWUU	6		1570	2740
KBK40GWUU	6	20	2160	4020
KBK50GWUU	6		3820	7940
KBK60GWUU	6		4700	9800

* Variaciones disponibles bajo demanda:

- Retén de acero
- Jaula de acero
- Inoxidable