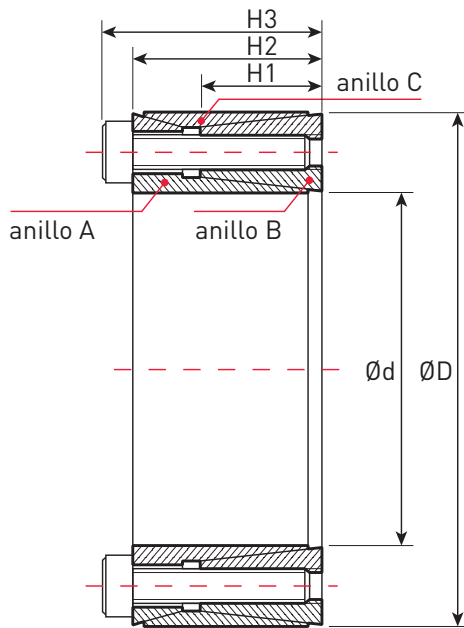


anillo de presión estándar

RINGBLOCK® 1000


Referencia	Dimensiones mm				Tornillos 12.5			Datos técnicos			
	Ød x ØD	H1	H2	H3	n	m	Ma Nm	Mt Nm	Fax kN	Pa N/mm²	Pm N/mm²
RB1000/18x40	18 x 40	12	19	25	6	M6	17	170	19	235	106
RB1000/19x41	19 x 41	12	19	25	6	M6	17	180	19	223	103
RB1000/20x42	20 x 42	12	19	25	6	M6	17	1920	19	212	101
RB1000/22x44	22 x 44	12	19	25	6	M6	17	210	19	192	96
RB1000/24x46	24 x 46	12	19	25	6	M6	17	230	19	176	92
RB1000/25x47	25 x 47	12	19	25	8	M6	17	320	26	226	120
RB1000/28x50	28 x 50	12	19	25	8	M6	17	360	26	202	113
RB1000/30x52	30 x 52	12	19	25	8	M6	17	380	26	188	109
RB1000/32x54	32 x 54	12	19	25	8	M6	17	410	26	176	105
RB1000/35x57	35 x 57	15	22	28	12	M6	17	770	44	223	137
RB1000/36x58	36 x 58	15	22	28	12	M6	17	790	44	217	135
RB1000/38x60	38 x 60	15	22	28	12	M6	17	840	44	205	130
RB1000/40x62	40 x 62	15	22	28	12	M6	17	880	44	195	126
RB1000/42x70	42 x 70	18	28	36	12	M8	41	1 610	77	269	161
RB1000/45x73	45 x 73	18	28	36	12	M8	41	1 720	77	251	155
RB1000/48x76	48 x 76	18	28	36	12	M8	41	1 840	77	235	149
RB1000/50x78	50 x 78	18	28	36	12	M8	41	1 920	77	226	145
RB1000/55x83	55 x 83	18	28	36	16	M8	41	2 810	102	274	181
RB1000/60x88	60 x 88	18	28	36	16	M8	41	3 060	102	251	171
RB1000/65x93	65 x 93	18	28	36	16	M8	41	3 320	02	232	162
RB1000/70x105	70 x 105	22	35	45	12	M10	83	4 720	135	23	155
RB1000/75x110	75 x 110	22	35	45	12	M10	83	5 060	135	217	148
RB1000/80x115	80 x 115	22	35	45	16	M10	83	7 200	180	271	189
RB1000/85x120	85 x 120	22	35	45	16	M10	83	7 650	180	255	181
RB1000/90x125	90 x 125	22	35	45	16	M10	83	8 100	180	241	174
RB1000/95x130	95 x 130	22	35	45	16	M10	83	8 550	180	228	167
RB1000/100x138	100 x 138	25	38	48	16	M10	83	9 730	195	206	150
RB1000/110x148	110 x 148	25	38	48	16	M10	83	10 700	195	188	139

Ma: Par de apriete Mt: Par máximo transmisible Fax: Esfuerzo axial máximo transmisible Pa: Presión en el eje Pm: Presión en el alojamiento