


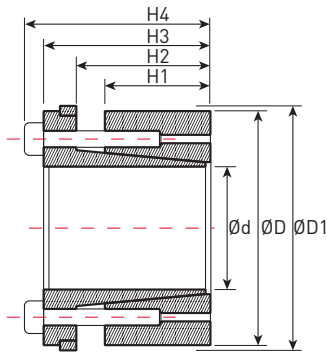

Referencia	Dimensiones mm						Tornillos 12.9			Datos técnicos			
	Ød x ØD	ØD1	H1	H2	H3	H4	n	M	Ma Nm	Mt Nm	Fax kN	Pa N/mm²	Pm N/mm²
RB1300.2/18x47	18 x 47	53	26	30	42	48	6	M6	17	310	35	198	76
RB1300.2/19x47	19 x 47	53	26	30	42	48	6	M6	17	330	35	187	76
RB1300.2/20x47	20 x 47	53	26	30	42	48	6	M6	17	350	35	178	76
RB1300.2/22x47	22 x 47	53	26	30	42	48	6	M6	17	380	35	162	76
RB1300.2/24x50	24 x 50	66	26	31	43	49	6	M6	17	420	35	148	71
RB1300.2/16x25	16 x 25	56	26	31	43	49	6	M6	17	440	35	142	71
RB1300.2/28x55	28 x 55	61	26	31	43	49	8	M6	17	490	35	127	65
RB1300.2/30x55	30 x 55	61	26	31	43	49	6	M6	17	520	35	119	65
RB1300.2/32x60	32 x 60	66	26	31	43	49	8	M6	17	700	47	148	79
RB1300.2/35x60	35 x 60	66	26	31	43	49	8	M6	17	800	47	136	79
RB1300.2/38x65	38 x 65	71	26	31	43	49	8	M6	17	900	47	125	73
RB1300.2/40x65	40 x 65	71	26	31	43	49	8	M6	17	900	47	119	73
RB1300.2/42x75	42 x 75	81	30	35,5	50,5	58,5	6	M8	41	1 400	60	136	76
RB1300.2/45x75	45 x 75	81	30	35,5	50,5	58,5	6	M8	41	1 500	60	127	76
RB1300.2/48x80	48 x 80	86	30	35,5	50,5	58,5	8	M8	41	1 500	60	119	71
RB1300.2/50x80	50 x 80	86	30	35,5	50,5	58,5	8	M8	41	1 600	60	114	71
RB1300.2/55x85	55 x 85	91	30	35,5	50,5	58,5	8	M8	41	2 400	90	138	89
RB1300.2/60x90	60 x 90	96	30	35,5	50,5	58,5	8	M8	41	2 600	90	127	84
RB1300.2/63x95	63 x 95	101	30	35,5	50,5	58,5	8	M8	41	2 700	90	121	80
RB1300.2/65x95	65 x 95	101	30	35,5	50,5	58,5	8	M8	41	2 800	90	117	80
RB1300.2/70x110	70 x 110	117	40	47	60	70	7	M10	83	4 300	120	117	74
RB1300.2/75x115	75 x 115	122	40	47	60	70	7	M10	83	4 600	120	109	71
RB1300.2/80x120	80 x 120	127	40	47	60	70	7	M10	83	4 900	120	102	68
RB1300.2/85x125	85 x 125	132	40	47	60	70	8	M10	83	6 000	140	110	75
RB1300.2/90x130	90 x 130	137	40	47	60	70	8	M10	83	6 400	140	104	72
RB1300.2/95x135	95 x 135	142	40	47	60	70	10	M10	83	8 400	180	123	87
RB1300.2/100x145	100 x 145	153	46	53	71	83	7	M12	145	9 200	180	106	73
RB1300.2/110x155	110 x 155	163	46	53	71	83	7	M12	145	10 100	180	97	59
RB1300.2/120x165	120 x 165	173	46	62	70	82	8	M12	145	12 600	210	101	74
RB1300.2/130x180	130 x 180	188	46	52	70	82	10	M12	145	17 100	263	117	84
RB1300.2/140x190	140 x 190	199	51	59	62	86	8	M14	230	20 100	287	107	79
RB1300.2/150x200	150 x 200	209	51	59	62	86	10	M14	230	26 900	359	124	93
RB1300.2/160x210	160 x 210	219	51	59	82	86	10	M14	230	28 700	359	117	89
RB1300.2/170x225	170 x 225	234	51	59	62	86	12	M14	230	36 600	430	132	100
RB1300.2/180x235	180 x 235	244	51	59	62	86	12	M14	230	38 700	430	124	95
RB1300.2/190x250	190 x 250	259	51	59	82	86	15	M14	230	51 100	538	147	112
RB1300.2/200x260	200 x 260	269	51	59	62	86	15	M14	230	51 600	538	140	108
RB1300.2/220x285	220 x 285	294	64	72	98	102	12	M16	355	65 100	592	111	86
RB1300.2/240x305	240 x 305	314	64	72	98	102	15	M16	355	88 700	740	128	101
RB1300.2/260x325	260 x 325	334	64	72	98	102	18	M16	355	115 400	887	141	113
RB1300.2/280x355	280 x 355	364	75	83	121	127	16	M18	485	132 900	949	120	95
RB1300.2/300x375	300 x 375	384	75	83	121	127	18	M18	485	160 200	1 068	126	101
RB1300.2/320x405	320 x 405	414	90	98	140	148	18	M20	690	220 600	1 380	127	100
RB1300.2/340x425	340 x 425	434	90	98	140	148	21	M20	690	273 700	1 610	140	112
RB1300.2/360x455	360 x 455	464	110	118	164	174	18	M22	930	307 000	1 706	114	90
RB1300.2/360x475	360 x 475	484	110	118	164	174	21	M22	930	378 100	1 990	126	101
RB1300.2/400x495	400 x 495	504	110	118	164	174	21	M22	930	398 000	1 990	120	97

Ma: Par de apriete Mt: Par máximo transmisible Fax: Esfuerzo axial máximo transmisible Pa: Presión en el eje Pm: Presión en el alojamiento