


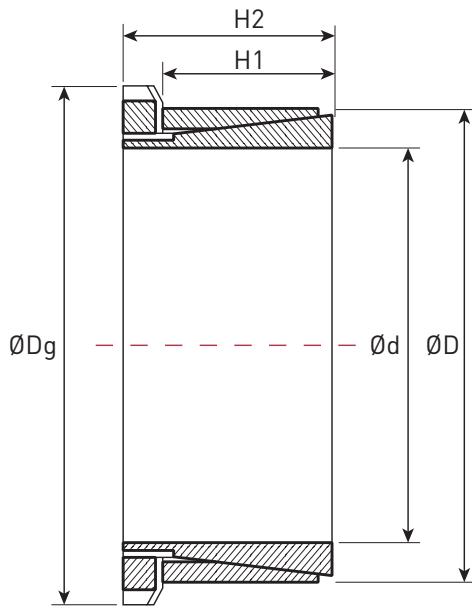

Referencia	Dimensiones mm				Tuerca		Datos técnicos			
	Ød x ØD	Dg	H1	H2	M	Ma Nm	Mt Nm	Fax kN	Pa N/mm ²	Pm N/mm ²
RB1500/14x25	14 x 25	32	23	31	M20 x 1	100	70	10 000	140	78
RB1500/15x25	15 x 25	32	23	31	M20 x 1	100	80	10 700	130	78
RB1500/16x25	16 x 25	32	23	31	M20 x 1	100	80	10 000	122	78
RB1500/17x25	17 x 25	34	23	31	M22 x 1	120	100	11 800	127	86
RB1500/18x30	18 x 30	38	24	33	M25 x 1,5	160	120	13 300	133	80
RB1500/19x30	19 x 30	38	24	33	M25 x 1,5	160	120	12 600	126	80
RB1500/20x30	20 x 30	38	24	33	M25 x 1,5	160	130	13 000	120	80
RB1500/22x35	22 x 35	45	29	38	M30 x 1,5	220	170	15 500	104	66
RB1500/24x35	24 x 35	45	29	38	M30 x 1,5	220	180	15 000	96	66
RB1500/25x35	25 x 35	45	29	38	M30 x 1,5	220	190	15 200	92	66
RB1500/28x40	28 x 40	52	34	44	M35 x 1,5	340	280	20 000	93	65
RB1500/30x40	30 x 40	52	34	44	M35 x 1,5	340	300	20 000	87	65
RB1500/32x45	32 x 45	58	34	44	M40 x 1,5	480	390	24 400	100	71
RB1500/35x45	35 x 45	58	34	44	M40 x 1,5	480	430	24 600	91	71
RB1500/38x50	38 x 50	65	34	46	M45 x 1,5	680	600	31 600	108	82
RB1500/40x50	40 x 50	65	34	46	M45 x 1,5	680	630	31 500	103	82
RB1500/45x55	45 x 55	70	34	47	M50 x 1,5	870	820	36 400	105	86
RB1500/50x60	50 x 60	75	35	49	M55 x 2	970	960	38 400	97	81
RB1500/55x65	55 x 65	80	35	49	M60 x 2	1 100	1 100	40 400	93	78
RB1500/60x70	60 x 70	85	35	50	M65 x 2	1 300	1 480	45 500	89	82

Ma: Par de apriete Mt: Par máximo transmisible Fax: Esfuerzo axial máximo transmisible Pa: Presión en el eje Pm: Presión en el alojamiento