


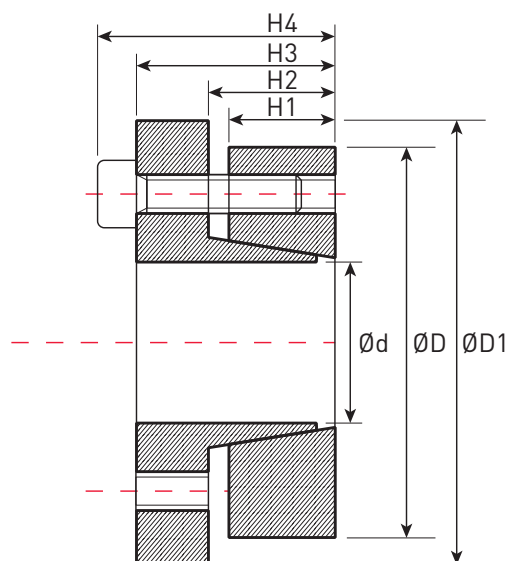

Referencia	Dimensiones mm						Tornillos 12.9			Datos técnicos			
	Ød x ØD	D1	H1	H2	H3	H4	n	m	Ma Nm	Mt Nm	Fax kN	Pa N/mm²	Pm N/mm²
RB1730/14x55	14 x 55	62	17	22	30	38	4	M8x25	41	234	37	415	117
RB1730/16x55	16 x 55	62	17	22	30	38	4	M8x25	41	268	37	363	117
RB1730/18x55	18 x 55	62	17	22	30	38	4	M8x25	41	333	37	357	117
RB1730/19x55	19 x 55	62	17	22	30	38	4	M8x25	41	352	37	338	117
RB1730/20x55	20 x 55	62	17	22	30	38	4	M8x25	41	370	37	321	117
RB1730/22x55	22 x 55	62	17	22	30	38	4	M8x25	41	407	37	292	117
RB1730/24x55	24 x 55	62	17	22	30	38	4	M8x25	41	445	37	268	117
RB1730/25x55	25 x 55	62	17	22	30	38	4	M8x25	41	463	37	257	117
RB1730/28x55	28 x 55	62	17	22	30	38	4	M8x25	41	519	37	229	117
RB1730/30x55	30 x 55	62	17	22	30	38	4	M8x25	41	556	37	214	117
RB1730/24x65	24 x 65	72	17	22	30	38	5	M8x25	41	556	46	335	124
RB1730/25x65	25 x 65	72	17	22	30	38	5	M8x25	41	579	46	321	124
RB1730/28x65	28 x 65	72	17	22	30	38	5	M8x25	41	649	46	287	124
RB1730/30x65	30 x 65	72	17	22	30	38	5	M8x25	41	695	46	268	124
RB1730/32x65	32 x 65	72	17	22	30	38	5	M8x25	41	741	46	251	124
RB1730/35x65	35 x 65	72	17	22	30	38	5	M8x25	41	811	46	230	124
RB1730/38x65	38 x 65	72	17	22	30	38	5	M8x25	41	880	46	211	124
RB1730/40x65	40 x 65	72	17	22	30	38	5	M8x25	41	927	46	201	124
RB1730/30x80	30 x 80	87	20	25	33	41	7	M8x25	41	972	65	318	119
RB1730/32x80	32 x 80	87	20	25	33	41	7	M8x25	41	1037	65	299	119
RB1730/35x80	35 x 80	87	20	25	33	41	7	M8x25	41	1134	65	273	119
RB1730/38x80	38 x 80	87	20	25	33	41	7	M8x25	41	1231	65	251	119
RB1730/40x80	40 x 80	87	20	25	33	41	7	M8x25	41	1296	65	239	119
RB1730/42x80	42 x 80	87	20	25	33	41	7	M8x25	41	1361	65	227	119
RB1730/45x80	45 x 80	87	20	25	33	41	7	M8x25	41	1458	65	212	119
RB1730/48x80	48 x 80	87	20	25	33	41	7	M8x25	41	1555	65	199	119
RB1730/50x80	50 x 80	87	20	25	33	41	7	M8x25	41	1620	65	191	119

Ma: Par de apriete Mt: Par máximo transmisible Fax: Esfuerzo axial máximo transmisible Pa: Presión en el eje Pm: Presión en el alojamiento