


SAC & SACL · SOPORTE PARA EJE*

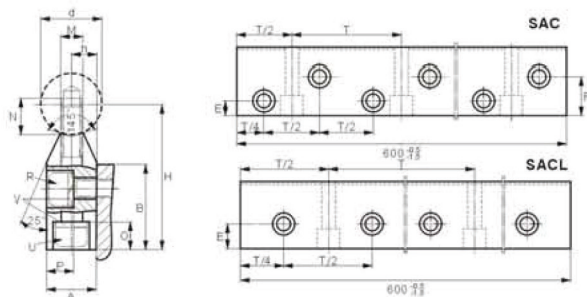

Referencia	d (mm)	h±0.02 (mm)	H±0.02 (mm)	A (mm)	M (mm)	E±0.15 (mm)	F±0.15 (mm)	T (mm)	O (mm)	P (mm)	B (mm)	N (mm)	R DIN912	U DIN912	V DIN7980	Peso (g/m)
SACL20	20	7,5	52	15	8,3	15	–	100	8,5	8,5	30	11	M6x16	M6x45	6	1100
SAC20	20	7,5	52	15	8,3	8	22	75	8,5	8,5	30	11	M6x16	M6x45	6	1000
SACL25	25	10,0	62	20	10,8	18	–	120	14,0	11,0	36	15	M8x20	M8x50	8	1500
SAC25	25	10,0	62	20	10,8	10	26	75	14,0	11,0	36	15	M8x20	M8x50	8	1300
SACL30	30	12,5	72	25	11,0	21	–	150	14,5	13,5	42	17	M10x25	M10x60	10	2100
SAC30	30	12,5	72	25	11,0	12	30	100	14,5	13,5	42	17	M10x25	M10x60	10	1900
SACL40	40	15,0	88	30	15,0	25	–	200	17,5	16,0	50	21	M12x30	M12x70	12/10	3000
SAC40	40	15,0	88	30	15,0	12	38	100	17,0	16,0	50	21	M12x30	M12x70	12	2700
SACL50	50	17,5	105	35	19,0	30	–	200	21,5	19,0	60	25	M14x35	M14x80	14/12	4200
SAC50	50	17,5	105	35	19,0	15	45	100	21,0	19,0	60	25	M14x35	M14x80	14	3700

* Disponible bajo pedido.