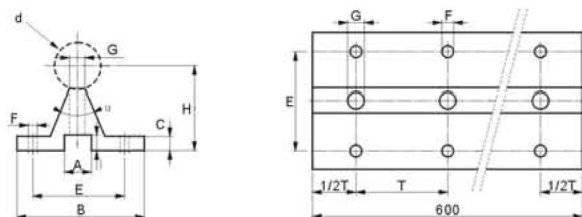


SAS · SOPORTE PARA EJE

Referencia	d (mm)	H $\pm$ 0.02 (mm)	B (mm)	C (mm)	α	E (mm)	F (mm)	G (mm)	A (mm)	I (mm)	T (mm)	Peso (g/m)
SAS12	12	22	40	5	50°	29	4,5	4,5	8,0	4,5	75	470
SAS16	16	26	45	5	50°	33	5,5	5,5	9,5	5,5	100	560
SAS20	20	32	52	6	50°	37	6,5	6,5	11,0	6,5	100	810
SAS25	25	36	57	6	50°	42	6,5	9,0	14,0	8,5	120	920
SAS30	30	42	69	7	50°	51	9,0	11,0	17,0	10,5	150	1240
SAS40	40	50	73	8	50°	55	9,0	11,0	19,0	12,5	200	1600
SAS50	50	60	84	9	46°	63	11,0	13,0	19,0	12,5	200	2150
SAS60	60	68	94	10	46°	72	11,0	15,0	22,0	14,5	200	2750