


## TK...UU · AUTOALINEABLE CERRADO

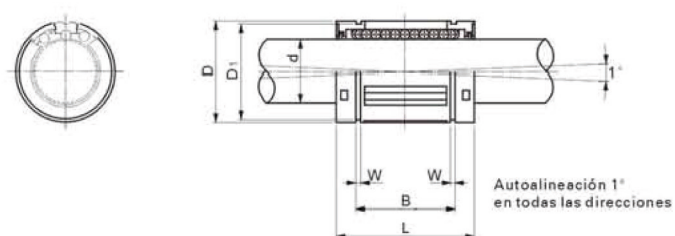

| Referencia | d<br>(mm) | ( $\mu$ m) | D<br>(mm) | L<br>(mm) | Tol.<br>(mm) | B<br>(mm) | Tol.<br>(mm) | W<br>(mm) | D1<br>(mm) | Peso<br>(g) |
|------------|-----------|------------|-----------|-----------|--------------|-----------|--------------|-----------|------------|-------------|
| TK12UU     | 12        | +8/0       | 22        | 32        | $\pm 0,2$    | 22,9      | 0<br>-0,2    | 1,30      | 21,0       | 21          |
| TK16UU     | 16        | +9<br>-1   | 26        | 36        |              | 24,9      |              | 1,30      | 24,9       | 43          |
| TK20UU     | 20        |            | 32        | 45        |              | 31,5      |              | 1,60      | 30,3       | 58          |
| TK25UU     | 25        | +11        | 40        | 58        |              | 44,1      | 0<br>-0,3    | 1,85      | 37,5       | 123         |
| TK30UU     | 30        | -1         | 47        | 68        |              | 52,1      |              | 1,85      | 44,5       | 216         |
| TK40UU     | 40        | +13/-2     | 62        | 80        |              | 60,6      |              | 2,15      | 59,0       | 333         |

| Referencia | Nº de circuito de bolas | Capacidad de carga |                 |
|------------|-------------------------|--------------------|-----------------|
|            |                         | Dinámica C (N)     | Estática Co (N) |
| TK12UU     | 5                       | 1,020              | 1,290           |
| TK16UU     | 5                       | 1,250              | 1,550           |
| TK20UU     | 6                       | 2,090              | 2,630           |
| TK25UU     | 6                       | 3,780              | 4,720           |
| TK30UU     | 6                       | 5,470              | 6,810           |
| TK40UU     | 6                       | 6,590              | 8,230           |