


TK...UUOP · AUTOALINEABLE ABIERTO

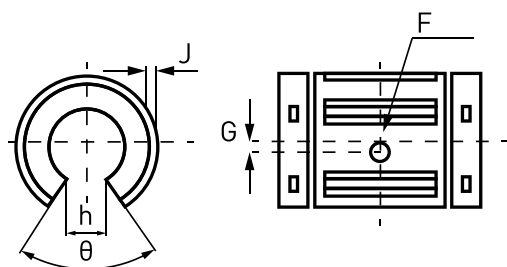

Referencia	d (mm)	(μ m)	D (mm)	L (mm)	Tol. (mm)	B (mm)	Tol. (mm)	W (mm)	D1 (mm)	h (mm)	θ	F ^{H11} (mm)	G (mm)	J (mm)	Peso (g)
TK12UUOP	12	+8/0	22	32	$\pm 0,2$	22,9	0 -0,2	1,30	21,0	6,5	66	3	-	0,7	17
TK16UUOP	16	+9 -1	26	36		24,9		1,30	24,9	9,0	68		-	0,7	35
TK20UUOP	20		32	45		31,5		1,60	30,3	9,0	55		-	0,9	48
TK25UUOP	25	+11	40	58		44,1	0 -0,3	1,85	37,5	11,5	57		1,5	1,4	103
TK30UUOP	30	-1	47	68		52,1		1,85	44,5	14,0	57		2,0	2,2	177
TK40UUOP	40	+13/-2	62	80		60,6		2,15	59,0	19,5	56		1,5	2,7	275

Referencia	Nº de circuito de bolas	Capacidad de carga	
		Dinámica C (N)	Estática Co (N)
TK12UUOP	4	1,020	1,290
TK16UUOP	4	1,250	1,550
TK20UUOP	5	2,090	2,630
TK25UUOP	5	3,780	4,720
TK30UUOP	5	5,470	6,810
TK40UUOP	5	6,590	8,230